


# Bifacial Dual Glass TOPCon Module

## JNBN132 – 605~625

### ENGINEERING DRAWING

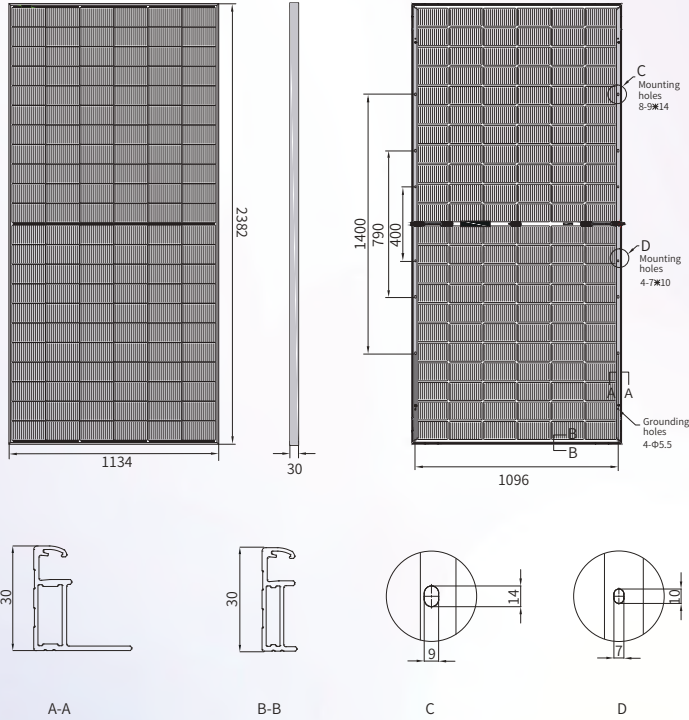

### MECHANICAL PARAMETERS

Cell (mm)	182*105 TOPCon
Dimensions (L*W*H) (mm)	2382*1134*30
Weight (kg)	32.6
Cable Cross Section Size (mm <sup>2</sup> )	4
No. of Cells & Connections	132(6*22)
No. of Diodes	3
Frame	Anodized Aluminium Alloy
Glass Thickness (mm)	2.0

### QUALIFICATION

Temperature Cycling Range (°C)	-40~+85
Max. Series Fuse Rating (A)	35
Max.Wind Load/Max.Snow Load (Pa)	2400/5400
Fire Rating	Class C
Junction Box & Connector Protection Grade	IP68
Bifacial Factor(%)	80±5

### TEMPERATURE COEFFICIENTS


Nominal Module Operating Temperature (NMOT)	43±2°C
Temperature Coefficient Voltage (Voc)	-0.25 %/°C
Temperature Coefficient Current (Isc)	0.045 %/°C
Temperature Coefficient Power (Pm)	-0.29 %/°C

### ELECTRICAL PARAMETERS

Module Type (1500V DC)	JNBN132-605	JNBN132-610	JNBN132-615	JNBN132-620	JNBN132-625	
STC AM1.5 1000W/m <sup>2</sup> Cell Temperature 25°C	Max. Power at STC (Pmpp/W)	605	610	615	620	625
	Output Tolerance (W)	0~+5	0~+5	0~+5	0~+5	0~+5
	Max. Power Voltage (Vmp/V)	38.89	39.06	39.23	39.40	39.57
	Max. Power Current (Imp/A)	15.56	15.62	15.68	15.74	15.80
	Open Circuit Voltage (Voc/V)	47.83	48.00	48.17	48.34	48.51
	Short Circuit Current (Isc/A)	16.27	16.33	16.39	16.45	16.51
	Module Efficiency (%)	22.40	22.58	22.77	22.95	23.14
BNPI AM1.5 300W/m <sup>2</sup> Cell Temperature 25°C (BIFACIAL OUTPUT-Backside Power Gain)	Max. Power (Pmpp/W)	670.34	675.88	679.76	685.29	690.81
	Max. Power Voltage (Vmp/V)	38.89	39.06	39.23	39.40	39.57
	Max. Power Current (Imp/A)	17.20	17.26	17.33	17.40	17.46
	Open Circuit Voltage (Voc/V)	47.83	48.00	48.17	48.34	48.51
	Short Circuit Current (Isc/A)	17.98	18.05	18.12	18.18	18.25
	Module Efficiency (%)	24.82	25.02	25.17	25.37	25.57

\*Measurement tolerance: Pmax:±3%, Voc:±3%, Isc: ±5%.

### I-V CURVE (615W)



### PACKING CONFIGURATION

Pieces Per Pallet	36
Pallets Per Container	20
Pieces Per Container	720

### DEFAULT

### OPTIONAL

Connector Type	<input type="checkbox"/> MC4 Compatible	<input type="checkbox"/> MC4
Cable Length	<input type="checkbox"/> 350mm/280mm	<input type="checkbox"/> Customized
Frame Color	<input type="checkbox"/> Silver	<input type="checkbox"/> Black



TUV: IEC/EN 61215, IEC/EN 61730  
GB/T 19001-2016/ ISO 9001:2015  
GB/T 24001-2016/ ISO 14001:2015  
GB/T 45001-2020/ ISO 45001:2018  
CNAS-CL01: ISO/IEC 17025:2017

CAUTION: The electrical parameters in this product datasheet do not refer to only one module. Read safety and installation instructions before using the product. The contents of this specification are for reference only and are subject to change without notice. Jinery reserves the right of final interpretation.  
JNM-20250311new-15.00 © 2024 JINNING CLEAN ENERGY TECHNOLOGY LTD. ALL RIGHTS RESERVED.

### 12-year Product materials and workmanship quality warranty

Output power		
The 1st year	The 12th year	The 30th year
≥ 99.00%	≥ 94.60%	≥ 87.40%

