






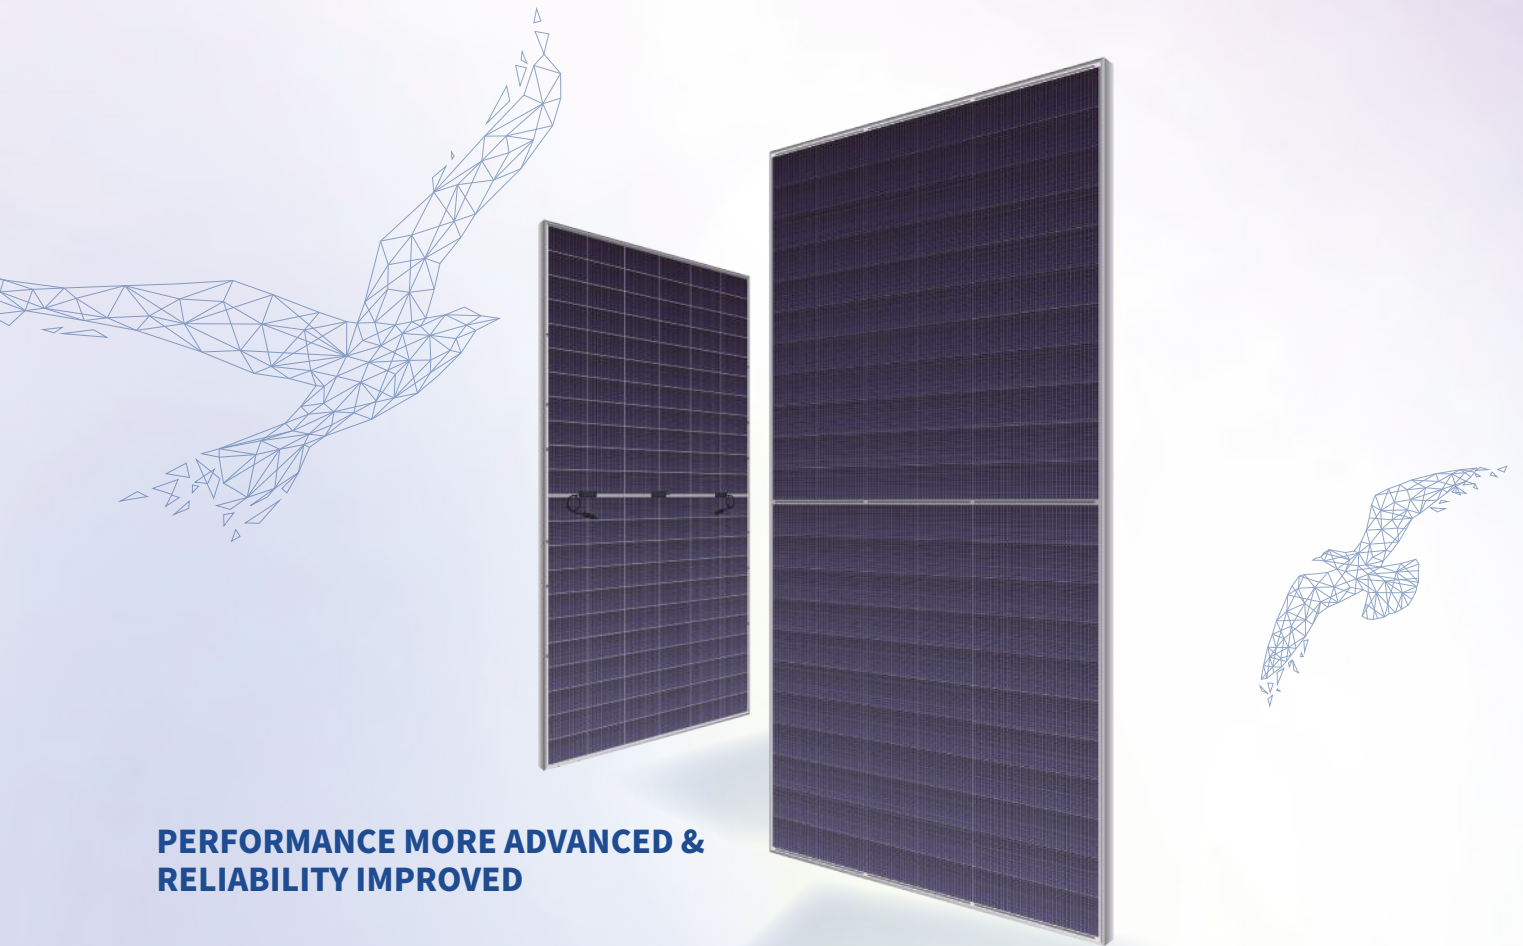

HIGH EFFICIENCY N-TOPCON SOLAR MODULE

G12 cell | SMBB 18BB | Half-cut | Bifacial

Optional: **JNBN132-695-715**



PERFORMANCE MORE ADVANCED & RELIABILITY IMPROVED

-  715W+ power is higher, bringing lower LCOE and system construction costs
-  Lower LID and anti-PID ensure long-term returns
-  Double layers of anti-reflection glasses increase light transmittance and effectively improve nominal power
-  Up to 80% bifacial factor gains 10%-30% extra generation in different scenarios

 **12** year product warranty  **30** year power generation warranty




 a **JINNENG HOLDING GROUP** company

www.jinergy.com
JINNENG CLEAN ENERGY TECHNOLOGY LTD / JINNENG PHOTOVOLTAIC TECHNOLOGY CO. LTD

Bifacial Dual Glass TOPCon Module

JNBN132-695~715

ENGINEERING DRAWING

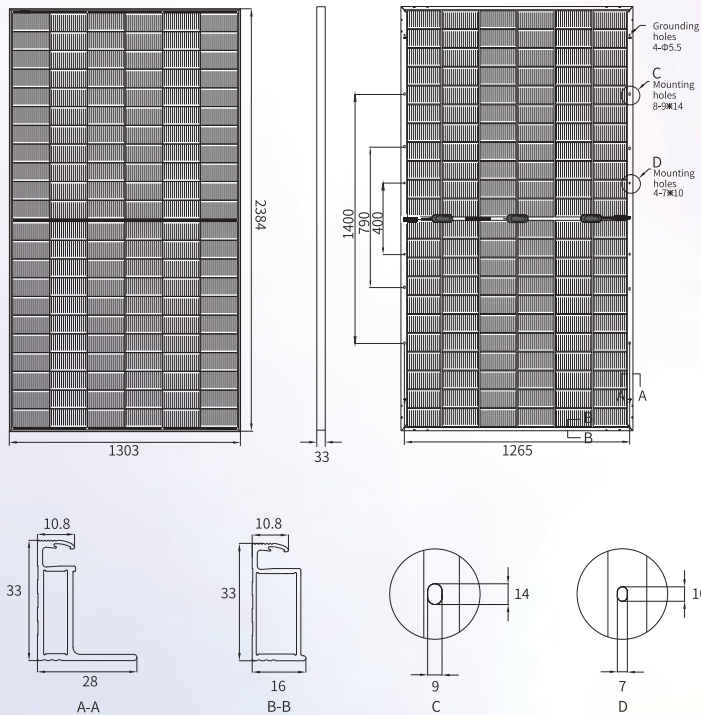

MECHANICAL PARAMETERS

Cell (mm)	210*105 TOPCon
Dimensions (L*W*H) (mm)	2384*1303*33
Weight (kg)	38.4
Cable Cross Section Size (mm ²)	4
No. of Cells & Connections	132(6*22)
No. of Diodes	3
Frame	Anodized Aluminium Alloy
Glass Thickness (mm)	2.0

QUALIFICATION

Temperature Cycling Range (°C)	-40~+85
Max. Series Fuse Rating (A)	35
Max.Wind Load/Max.Snow Load (Pa)	2400/5400
Fire Rating	Class C
Junction Box & Connector Protection Grade	IP68
Bifacial Factor(%)	80±5

TEMPERATURE COEFFICIENTS


Nominal Module Operating Temperature (NMOT)	43±2°C
Temperature Coefficient Voltage (Voc)	-0.25 %/°C
Temperature Coefficient Current (Isc)	0.045 %/°C
Temperature Coefficient Power (Pm)	-0.29 %/°C

ELECTRICAL PARAMETERS

Module Type (1500V DC)	JNBN132-695	JNBN132-700	JNBN132-705	JNBN132-710	JNBN132-715	
STC AM1.5 1000W/m ² Cell Temperature 25°C	Max. Power at STC (Pmpp/W)	695	700	705	710	715
	Output Tolerance (W)	0+5	0+5	0+5	0+5	0+5
	Max. Power Voltage (Vmp/V)	39.32	39.49	39.66	39.83	40.00
	Max. Power Current (Imp/A)	17.68	17.73	17.78	17.83	17.88
	Open Circuit Voltage (Voc/V)	47.04	47.21	47.38	47.55	47.72
	Short Circuit Current (Isc/A)	18.50	18.55	18.60	18.65	18.70
Module Efficiency (%)	22.37	22.53	22.70	22.86	23.02	
Backside Power Gain	10%		20%		30%	
With Different Power Generation Gain (Regarding 705W as an example)	Max. Power (Pmpp/W)	775.5		846.0		916.5
	Max. Power Voltage (Vmp/V)	39.66		39.66		39.66
	Max. Power Current (Imp/A)	19.56		21.34		23.11
	Open Circuit Voltage (Voc/V)	47.38		47.38		47.38
	Short Circuit Current (Isc/A)	20.46		22.32		24.18
Module Efficiency (%)	24.96		27.23		29.50	

*Measurement tolerance: Pmax:±3%, Voc:±3%, Isc:±5%.

I-V CURVE (705W)



PACKING CONFIGURATION

Pieces Per Pallet	33
Pallets Per Container	18
Pieces Per Container	594

DEFAULT

OPTIONAL

Connector Type	<input type="checkbox"/> MC4 Compatible	<input type="checkbox"/> MC4
Cable Length	<input type="checkbox"/> 350mm/280mm	<input type="checkbox"/> Customized
Frame Color	<input type="checkbox"/> Silver	<input type="checkbox"/> Black



TUV: IEC/EN 61215, IEC/EN 61730
 GB/T 19001-2016/ ISO 9001:2015
 GB/T 24001-2016/ ISO 14001:2015
 GB/T 45001-2020/ ISO 45001:2018
 CNAS-CL01: ISO/IEC 17025:2017

12-year Product materials and workmanship quality warranty

Output power			
The 1st year	The 12th year	The 30th year	
≥99.00%	≥94.60%	≥87.40%	

CAUTION: The electrical parameters in this product datasheet do not refer to only one module. Read safety and installation instructions before using the product. The contents of this specification are for reference only and are subject to change without notice. Jinery reserves the right of final interpretation.
 JNM-20240520-14.0 © 2024 JINNENG CLEAN ENERGY TECHNOLOGY LTD. ALL RIGHTS RESERVED.

